

F7

4K@60Hz

PRO

TOUCH • 3D LUT

7" On-Camera Director Monitor

Sony F970 External Install and Power Kit



FHD Resolution



Touch Screen



Custom 3D LUT



HDR Monitoring



4K HDMI In & Out



External Install and Power Design




Power for Camera



5V Type-C Power Supply



USE PROFESSIONAL REC.709 COLOR CALIBRATION STANDARD

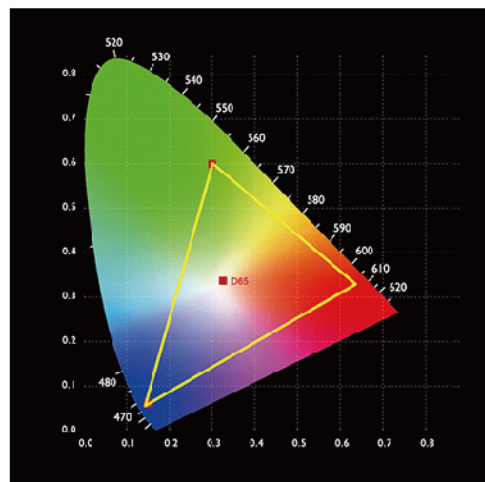

FEATURES

- 1920x1200 full HD IPS screen
- Touch screen menu operation
- Support 3D LUT Log to REC.709 and user 3D LUT upload
- Support HDR monitoring
- Support HDMI input and output up to 4K 60Hz
- Sony F970 external install and power kit design can be used to install and supply power to external equipment, easy to install and disassemble, simplify your photography equipment.
- With Waveform, Vectorscope, RGB Histogram, Focus Assist, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- Stereo Earphone output
- DC 8V power out to power your DSLR camera or mirrorless camera

PROFESSIONAL AND RICH AUXILIARY FUNCTIONS



3D LUT




Waveform



Vector Scope



Histogram



Anamorphic Mode



Peaking Filter



False Colors



Exposure




Zoom-in



Image Flip



Embedded Audio




Nine Grid

SD card slot import LUT




Multiple power supply ways
Sony F970 external power and install kit

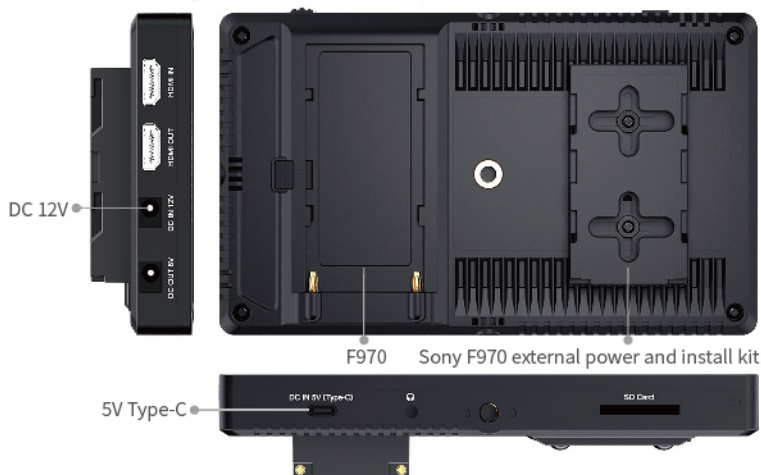







>> PARAMETER

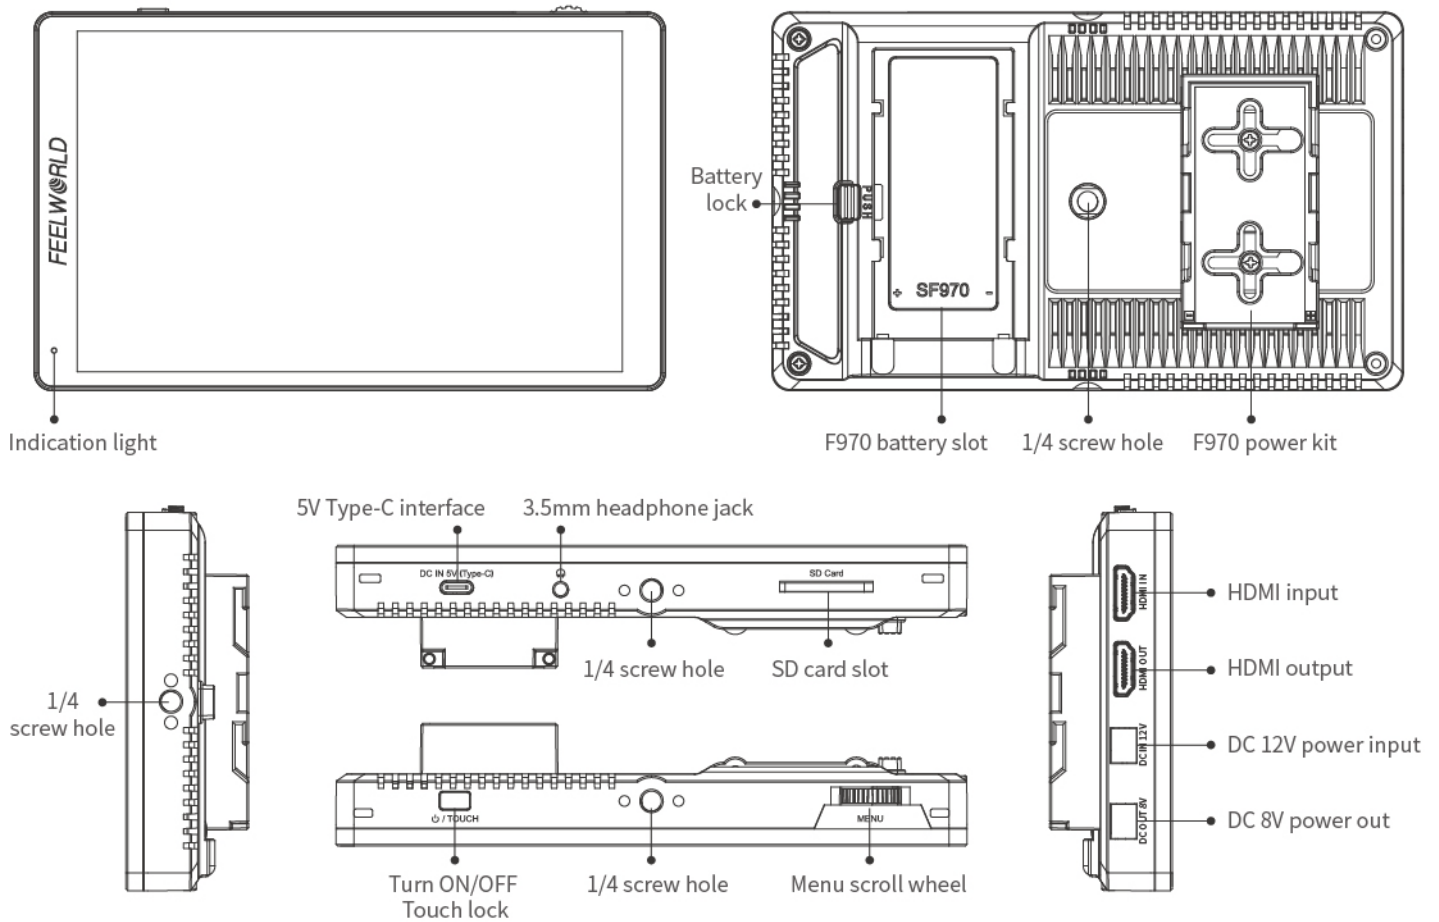Description	7-inch 3D LUT HDMI On-camera Monitor with F970 Install and Power Kit
Model	F7 PRO
Screen size	7" Touch Screen
Color Gamut	16.7M (8 bit)
Resolution	1920x1200 pixels
Dot pitch	0.07875 (H) x 0.07875 (W) (mm)
Aspect Ratio	16:10
Brightness	500cd/m2
Contrast	1200:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	HDMI, SD Card
Output	HDMI
Audio	3.5mm Stereo Headphone
Power In	DC IN 12V, Barrel (5.5mm outer, 2.1mm inner), DC IN 5V (Type-C)
Power Out	DC OUT 8V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)
HDMI Input/ Output Support Format	480i/576i/480p/576p
	1080i (60/59.94/50)
	720p (60/59.94/50/30/29/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
	4K 3840×2160p (60/50/30/29.97/25/24/23.98Hz), 4096×2160p (24Hz)
Power Consumption	≤9W
Input Voltage	DC7~24V
Power Connector	DC
Battery Plate	F970 Battery Plate
Operating Temperature	-20°C ~ 55°C
Storage Temperature	-30°C ~ 65°C
Install Way	¼-20 thread points (top, bottom, right, back)
Unit Size	175Lx105Hx22D (mm)
Unit Weight	330g
Standard Accessory	Micro HDMI Cable/Mini hot shoe mount adapter/Sunshade/Manual

>> STRUCTURE



>> PACKING LIST

 <p>Monitor</p>	 <p>Micro HDMI cable</p>	 <p>Sun hood</p>
 <p>Mini hot shoe mount</p>	 <p>Hex wrench</p>	 <p>User manual</p>



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2672627

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn